


#2

PI 1114669



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office

January 14, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE.

APPLICATION NUMBER: 10/358,445

FILING DATE: February 04, 2003

RELATED PCT APPLICATION NUMBER: PCT/US03/35029

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS



H. L. Jackson
H. L. JACKSON
Certifying Officer

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Best Available Copy

02-06-03 10358445 A2040

PATENT

Attorney Docket No. VANMA99.001C1

Date: February 4, 2003

Page 1

02/04/03
10358445
U.S. PTO

JC845 U.S. PTO
10/358445

United States Patent and Trademark Office
P.O. Box 2327
Arlington, VA 22202

ATTENTION: BOX PATENT APPLICATION

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Eric Cordemans de Meulenaer, Baudouin Hannecart, and Yves Canivet

For: DEVICE AND PROCESS FOR TREATING A LIQUID MEDIUM

Enclosed are:

- (X) Four (4) sheet(s) of drawings.
- (X) This application is a continuation of prior application 09/214,398, filed August 27, 1999, which is a National Phase Application under 35 USC 371 of PCT/BE97/00078, filed July 4, 1997, which claims priority to Belgian Patent Application 09600613, filed July 4, 1996.
- (X) A copy of Declaration from prior application is enclosed.
- (X) Preliminary Amendment is enclosed.
- (X) Incorporation by Reference. The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
- (X) Initial signed declaration by inventor(s).
- (X) Return prepaid postcard.

CLAIMS AS FILED

FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
Basic Fee			\$750	\$750
Total Claims	23 - 20 =	3 x	\$18	\$54
Independent Claims	6 - 3 =	3 x	\$84	\$252
If application contains any multiple dependent claims(s), then add			\$280	\$0
TOTAL FILING FEE		\$1,056		

- (X) A check in the amount of \$1,056 to cover the filing fee is enclosed.

10358445 .02040


PATENT

Attorney Docket No. VANMA99.001C1

Date: February 4, 2003

Page 2

- (X) The Commissioner is hereby authorized to charge any additional fees which may be required, now or in the future, or credit any overpayment to Account No. 11-1410.
- (X) Please use Customer No. 20,995 for the correspondence address.



Thomas R. Arno
Registration No. 40,490
Attorney of Record
Customer No. 20,995
(619) 235-8550

S:\DOCS\MCB\MCB-1734.DOC
020303

Knobbe Martens Olson & Bear LLP

Intellectual Property Law

10358445.0204

2040 Main Street
Fourteenth Floor
Irvine, CA 92614
Tel 949-760-0404
Fax 949-760-9502
www.kmob.com

Thomas R. Arno

BOX PATENT APPLICATION
United States Patent and Trademark Office
P.O. Box 2327
Arlington, VA 22202


CERTIFICATE OF MAILING BY "EXPRESS MAIL"

Attorney Docket No. : VANMA99.001C1
Applicant(s) : de Meulenaer et al.
For : DEVICE AND PROCESS FOR TREATING A
LIQUID MEDIUM
Attorney : Thomas R. Arno
"Express Mail"
Mailing Label No. : EV 149 804 709 US
Date of Deposit : February 4, 2003

I hereby certify that the accompanying

Transmittal letter; specification in 19 pages; Preliminary Amendment in 2 pages;
4 sheets of drawings; SIGNED Declaration by Inventor in 2 pages; Check(s) for
Filing Fee(s); Return Prepaid Postcard

are being deposited with the United States Postal Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the
United States Patent and Trademark Office, P.O. Box 2327, Arlington, VA 22202.


Craig Smelter

S:\DOCS\MCB\MCB-1738.DOC
020303

San Diego
619-235-8550

San Francisco
415-954-4114

Los Angeles
310-551-3450

Riverside
909-781-9231

San Luis Obispo
805-547-5580

10358445.02040

VANMA99.001C1

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant	:	de Meulenaer et al.)	Group Art Unit Unknown
Appl. No.	:	Unknown)	
Filed	:	Herewith)	
For	:	DEVICE AND PROCESS FOR TREATING A LIQUID MEDIUM)	
Examiner	:	Unknown		

PRELIMINARY AMENDMENT

United States Patent and Trademark Office
P.O. Box 2327
Arlington, VA 22202

Dear Sir:

Please amend the above-referenced application prior to examination as follows:

IN THE SPECIFICATION

Please insert the following paragraph at page 1, line 2, after the title:

CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority to U.S. Patent Application number 09/214,398, filed August 27, 1999, which is a National Phase application under 35 U.S.C. 371 of PCT/BE97/00078, filed July 4, 1997, which claims priority to Belgian Patent Application 09600613, filed July 4, 1996.

Please insert the following paragraph at page 6, line 6:

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1 and 2 relate to a device for treating a liquid medium in the present invention.

10358445.02040

Appl. No. : Unknown
Filed : Herewith

Figures 3 and 4 illustrate comparative tests with and without injection of microbubbles, respectively.

Figure 5 illustrates treatments with and without ultrasound.

REMARKS


Applicants respectfully request entry of the accompanying Preliminary Amendment. No new matter has been added in the form of this Preliminary Amendment.

Please charge any additional fees, including any fees for additional extension of time, or credit overpayment to Deposit Account No. 11-1410.

Respectfully submitted,

KNOBBE, MARTENS, OLSON & BEAR, LLP

Dated: 2/4/03

By: 
Thomas R. Arno
Registration No. 40,490
Attorney of Record
Customer No. 20,995
(619) 235-8550

S:\DOCS\MCB\MCB-1735.DOC
020303

DEVICE AND PROCESS FOR TREATING A LIQUID MEDIUMObject of the invention

5 The present invention relates to a novel device and to a process for treating a liquid medium, which are intended to remove microorganisms such as algae, bacteria, viruses, etc., and/or which are intended to allow a supersaturation with salts in the liquid medium.

Technological background

10 It is known to those skilled in the art that, depending on whether high-frequency or low-frequency ultrasound is used, different effects can be obtained on fluids. In order to obtain mechanical effects, low frequencies (generally between 16 and 100 kHz) are regularly used.

15 These mechanical effects, which are due to cavitation, make it possible, for example, to mix, emulsify and disperse heterogeneous substances, to degas the liquids, etc. These mechanical effects also create high shear effects in the liquids, which makes it possible, for example, to disrupt living cells present in this medium, to the point of rupturing the walls of cells of this type.

20 These same mechanical effects are also used to clean surfaces by the action of the microjets of liquid produced by the implosion of the cavitation bubbles. Similarly, the fact that various reactants can be mixed very efficiently is advantageously used to promote diffusion phenomena in various chemical reactions, especially heterogeneous reactions.

25 If high frequencies are used, generally of between 300 kHz and several MHz, the cavitation phenomena become relatively less energetic and the mechanical effects are more reduced than when low frequencies are used.

30 By applying high-frequency ultrasound to a liquid medium, the lifetime of the cavitation bubbles

produced is greatly reduced, and chemical phenomena in a homogeneous phase take place, which are radically different from those observed when lower frequencies are applied.

5 One parameter which is specific to the use of high-frequency ultrasound is that, despite the low mechanical energy required to degas the solutions, the effect obtained is greater than when low-frequency
10 ultrasound is applied, which itself requires more power.

Prior art

It is known from different prior art documents that the use of ultrasound allows the detoxification of
15 liquid media.

American patent US-5,198,122 describes a process for detoxifying liquid and solid materials comprising various toxic organic compounds, which consists in adding to the medium a catalyst comprising a sodium
20 borohydride or a lithium aluminium hydride to the said materials, which are then subjected to ultrasound so as to bring about cavitation in the mixture and to allow easier detoxification or extraction of the contaminating substances.

25 German patent application DE-4,407,564 describes a process for oxidizing organic substances or microorganisms, which is obtained by adding oxidizing agents (ozone) or phase-transfer catalysts.

Japanese patent application JP-930343777
30 (Marsima Aqua Syst. Corp.) describes a process and a purification installation for a water reservoir containing vegetable plankton. In the first reservoir of this installation, the vegetable plankton is inactivated using an ultrasound vibrator which induces
35 cavitation in the water. The product of this treatment is then transferred into a second reservoir, in which predation of the inactivated vegetable plankton by animal plankton is promoted.

- 3 -

Similarly, it has been proposed in various documents (JP-900401407 (Ina Shokuhin Kogyo KK), JP-920035473 (Kubota Corp.), JP-920035472 (Kubota Corp.) and JP-920035896 (Kubota Corp.) to bring about
5 the removal of organochlorine substances or to remove microorganisms by a cavitation phenomenon using ultrasound and injections of ozone, peroxides and/or catalysts.

Japanese patent application JP-820010627
10 (Hitachi Kiden Kogyo KK) describes a process for removing algal spores by a mechanical effect brought about by the use of high and low frequency ultrasound, inducing the sterilization and removal of the spores which become attached to plates and are then removed by
15 the purifying effect of the low frequency ultrasound cavitation.

All of these previous examples use the mechanical effects of low frequency ultrasound.

It is known from the scientific publication by
20 Pétrier C. et al. (Journal of Physical Chemistry, No. 98, 10514-10520 (1994)) that the sonochemical degradation of phenols in aqueous solutions varies as a function of the ultrasound emission frequency. According to that document, the degree of sonochemical
25 degradation is thought to be directly associated with the presence in the solution of free radicals such as, for example, H^{\cdot} , OH^{\cdot} and HOO^{\cdot} , originating from the sonolysis of the water by ultrasound. According to that document, the production of these free radicals, in
30 particular the OH^{\cdot} and OOH^{\cdot} radicals, is said to be greater by working with high frequency ultrasound emission.

As is seen in the illustrations in that document, the radicals produced by ultrasound induce a
35 fluorescence whose distribution varies as a function of the conception and design of the apparatus, as well as of the ultrasound emission frequency. This fluorescence induced by the radicals produced by ultrasound is

demonstrated by the addition of luminol to the aqueous composition.

However, that document does not in any way suggest that the oxidation phenomenon obtained by high frequency ultrasound could be used to attack micro-organisms present in this aqueous medium and thus remove them.

American patent US-2,717,874 describes a device for processing an aqueous medium comprising micro-organisms, by adding chlorinated reagents. The said device comprises a bell (cell) which communicates with a reservoir of the aqueous medium to be treated, and contains a high frequency ultrasound emitter located at the base of the bell. In addition, the bell has a device for emitting air bubbles at the cone of the geyser.

Patent application WO 93/13674 describes a process for pasteurizing milk or milk-based products so as to remove a certain number of microorganisms such as bacteria, viruses, spores, etc. The device and the process described in that document are based on the use of the cavitation obtained at low frequencies and at high power during particularly long application times.

European patent application EP-A1-0,633,049 describes a process for treating a liquid by emitting an ultrasound field so as to separate the particles present in this liquid. That process uses high frequencies, which allow the separation of the micro-particles by standing-wave fields in which the position is modified by a phase or frequency variation, which entrains the particles which thus remain concentrated in nodes or antinodes. In the case of biological particles, this device makes it possible to create a bioreactor in which the solid particles of any nature remain confined in the ultrasound field, which allows filtration of the liquid medium. It should be pointed out that the device makes it possible to sterilize biological materials and to inactivate microorganisms.

American patent US-4,961,860 describes a process for treating water, so as to remove the microorganisms present by means of ultrasound emission of low-frequency power. However, that device requires particularly large energy consumption in order to obtain a mechanical effect which removes the microorganisms.

Aims of the invention

The present invention is directed towards providing a device and a process which can neutralize, prevent the growth of and/or remove a certain number of undifferentiated animal cells, such as tumour cells and/or microorganisms, in particular algae, bacteria, viruses, etc., from a liquid medium in a simple and inexpensive manner, and which do not have the drawbacks of the prior art.

One specific aim of the present invention is to neutralize, prevent the growth of and/or remove the said undifferentiated cells or microorganisms, in particular algae, present in liquid media such as swimming-pool water, water towers, fishponds, aquariums or any other water reservoir, and by extension any industrial circuit, for example a cooling circuit, in which the quality of the water is particularly important, or physiological fluids such as blood or plasma, which can be extracted from and/or administered to man or animals.

The invention is also directed towards obtaining a device and a process which do not require the addition of additional chemical products needed to obtain the abovementioned effects in the media treated.

Another aim of the invention is to obtain a device and a process which do not consume much energy.

An additional aim of the present invention is to obtain a device and a process for treating a liquid medium with ultrasound without giving rise to a standing-field phenomenon.

A final aim of the present invention is to provide a device and a process for treating an aqueous medium, which makes it possible to supersaturate the liquid medium with salts, i.e. to obtain salt concentrations greater than the natural solubility of these salts in the aqueous medium.

Characteristic features of the invention

The present invention as represented in Figures 1 and 2 relates to a device or installation for treating a liquid medium, preferably an aqueous medium (which may contain undifferentiated cells or microorganisms), characterized in that it comprises a compartment 2, preferably of cylindrical shape or of rectangular cross-section, preferably communicating with a "reservoir" 6 of the liquid medium to be treated, the said compartment 2 containing (along its wall) one or more high-frequency ultrasound 4 emitters 1 which ultrasound is emitted into the compartment 2 (preferably into the centre of this compartment 2), and one or more gas microbubble 5 emitters 3, which are arranged so as to emit the gas microbubbles 5 into the ultrasound 4 field emitted in the compartment 2.

The term "microbubbles" is intended to refer to gas bubbles with an average diameter of less than 1 mm, preferably less than or equal to 50 μm , more particularly less than 30 μm .

The term "undifferentiated cells" is intended to refer to cells displaying a hyperproliferative effect, such as tumour cells, bone marrow cells or totipotent cells, in particular algal cells, etc.

The term "microorganisms" present in a liquid medium which it is desired to treat is intended to refer to any pathogenic or non-pathogenic microorganism which can give rise to harmful effects in man or animals or in installations for transporting and storing liquid media. Such microorganisms can be bacteria, viruses or algae. The definition of these microorganisms comprises unicellular and multicellular

entities, in particular algae, which may be present in various liquid media, preferably aqueous media such as swimming pools, water reservoirs, aquariums, industrial cooling circuits such as cooling towers, etc.

5 The term "liquid medium" is also intended to refer to physiological liquids which may be administered to man or animals, or extracted from man or animals and reinjected therein after treatment (ex-vivo treatment of physiological liquids such as blood, 10 serum, cephalorachidian fluid, etc.), as described in American patent US-5,401,237 incorporated herein by way of reference.


 The term "high frequencies" is intended to refer to frequencies of between 100 kHz and several 15 MHz. Preferably, the high frequencies used are between 200 kHz and 10 MHz.

 Preferably, the said emitter 3 of gas microbubbles 5 is arranged at the base 11 of the compartment 2, i.e. at the bottom of compartment 2, such that the 20 microbubbles move by rising naturally or by entrainment of the gas in the flow of liquid.

 Advantageously, the gas microbubbles are microbubbles of air, ozone or oxygen.

 According to the invention, the said microorganisms appear to be removed by the production in 25 their environment of radicals such as H^\cdot , OH^\cdot and HOO^\cdot which can also form H_2O_2 , this molecule and/or these radicals being toxic to these microorganisms and thus bringing about their inactivation and/or destruction.

30 The species created are thought to be derived from the reactions of high-frequency ultrasound on the water molecule, possibly giving rise (in particular in the presence of oxygen) to the following reactions:

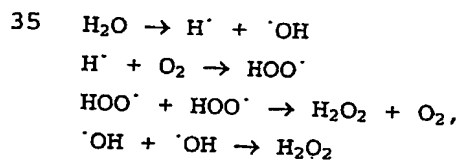

Advantageously, the energy required to produce the toxic species is reduced if the process is performed in the presence of these microbubbles.

The reason for this is that it would appear
5 that the injection of microbubbles into the ultrasound field gives rise to an increase in the phenomenon of sonoluminescence, by superposition of the microbubbles onto the cavitation bubbles induced by the ultrasound, which appears to multiply the number of excited and
10 toxic species.

This phenomenon is observed on a macroscopic level when the ultrasound treatment is synergistically combined with the presence of microbubbles of suitable size.

15 This phenomenon is emphasized by the fragmentation of the microbubbles 5 created when they pass into the ultrasound field 4, in particular when the device includes several successive emitters along the wall of the compartment 2, which ensure greater fragmentation
20 of the microbubbles, in a progressive manner.

These characteristics are illustrated in particular by the comparative tests in the attached Figures 3 to 5.

Figures 3 and 4 summarize the counting of algae
25 of the type *Selenastrum capricornutum*. It is observed that when these algae are placed under optimum culture conditions, their recovery threshold is inhibited when they are treated with the device of the invention (with injection of microbubbles (Figure 3) and without
30 injection of microbubbles (Figure 4)). For a given ultrasound power, the efficacy of the treatment is proportional to the residence time in the compartment, and, consequently, inversely proportional to the flow rate.

35 Figure 5 demonstrates, relative to a reference blank (treated with all the concentration, flow rate, temperature and bubbling conditions equal, but without ultrasound), the effect of the ultrasound. It is observed that a treatment with ultrasound but without

injection of microbubbles does not give rise to an inhibition of growth or to a decrease in the number of algae in the liquid media.

5 In addition, the device has the advantage that there is no need to devote the ultrasound to specific zones, since it is observed that the treatment system functions by diffusing the products formed in situ (for example radicals and H_2O_2 formed) towards the reservoir 6 of aqueous medium to be treated.

10 In addition, the ultrasound 4 emitter 1 in the device of the invention is oriented so as not to give rise to any standing-wave phenomena, i.e. it is oriented obliquely relative to the axis 9 of the compartment 2 (acute angle not perpendicular to this axis 9) and
15 relative to the flow of liquid and to the flow of microbubbles 5 (see Figure 2). This characteristic makes it possible for all the microbubbles 5 in the compartment 2 to be treated in a statistically identical manner, without creating stationary zones in the
20 said compartment 2.

According to a preferred embodiment of the invention, the device also comprises a light emitter 12 which emits into the compartment 2 in the ultrasound 4 field, i.e. an electromagnetic radiation emitter, most
25 of the frequency of which radiation is in the visible range. However, for certain applications, in order to remove certain specific microorganisms, it may be advantageous also to emit electromagnetic radiation of which certain frequencies correspond to ultraviolet
30 radiation (of UVA, UVB or UVC type) or other types of energy emission such as infrared, laser, microwaves, etc.

The reason for this is that the inventors have observed, unexpectedly, that a treatment comprising the
35 emission of microbubbles into the fields combined with ultrasound and light radiation is particularly effective at inactivating and removing microorganisms, in particular algae, present in the liquid medium. The phenomenon of sonoluminescence can promote the produc-

tion of extremely active oxygenated species such as the superoxide radical or singlet oxygen, which are responsible for a whole series of biochemical reactions which are extremely toxic for certain microorganisms.

5 It is known that such a phenomenon can take place in the presence of so-called photosensitizing molecules, so as to give rise to an antitumour action on certain cancer cells (Umemura S.I., Japanese J. of Cancer Res., 81, pp. 962-966 (1990)). Such molecules
10 are, in particular, porphyrins, chlorines, tetracyclines, methylene blue, fluorescein, acridine, rhodamine, etc. These active agents are injected into the organism or administered orally and subsequently activated by sonoluminescence, and thus produce the
15 singlet oxygen which in turn plays a fundamental role, in particular in biochemical processes due to oxidative stress. The action of singlet oxygen is to oxidize the various cell components, such as the proteins, lipids, amino acids and nucleotides.

20 According to the present invention, it is not always necessary to add a photosensitizing agent to the medium to be treated, since the inventors have observed, unexpectedly, that this effect can be produced in situ on certain microorganisms, in particular algae, or
25 certain cells, in particular undifferentiated cells such as tumour cells present in physiological fluids such as blood, already containing these photosensitizing molecules.

30 When a human or animal physiological fluid is treated, the device of the present invention may not contain a reservoir 6 and can be directly connected to the human or animal body from which the physiological fluid is taken and reinjected by a process of extra-corporal treatment of the human or animal body.

35 According to a preferred embodiment of the invention, as represented in Figure 1, the device comprises, placed between the reservoir 6 and the compartment 2, a means 13 for electromagnetic treatment of the aqueous medium. This means 13 is thus separate from the

compartment 2 and placed upstream of it relative to the flow of the aqueous medium to be treated.

The expression "means for electromagnetic treatment of an aqueous medium" is intended to refer to any apparatus which allows the formation of crystals to be modified, or even directed (modification of the morphology of the crystals).

Such apparatus is described in particular in European patent application EP-0,515,346, incorporated herein by way of reference, which describes a generator for controlling the nucleation and/or growth of crystals and/or their morphology. That document describes a specific example for directing calcium carbonate crystals into a dendritic shape, these crystals being, in this case, in a shape which is incapable of forming tartar encrustations (in pipes, exchangers, etc.).

Such a means for electromagnetic treatment of the aqueous medium allows, when the said aqueous medium is subjected to the action of a field created between at least two transfer means (so as to modify the nucleation and/or formation and/or growth of crystals, in particular of calcium carbonate), at least one of the said transfer means receiving substantially rectangular electrical signals comprising a first phase in which the signal is close to a lower level and a second phase in which the signal is close to a higher level, the said signals having, when they are close to the lower level or to the higher level, a series of dampened variations.

Advantageously, the signals correspond to the superposition of a rectangular wave with a frequency of less than 100,000 Hz, preferably between 1000 and 30,000 Hz, and of a dampened sinusoidal wave with a frequency of less than 100,000 Hz, preferably between 1 MHz and 15 MHz, and the dampening of the sinusoidal wave is such that after 5 periods of the said wave, the amplitude of the variation is less than 10% of that of the initial variation.

In one specific embodiment of the invention, for each phase of the rectangular wave, this wave is combined with a single dampened sinusoidal wave, the frequency of the dampened wave being greater than that of the rectangular wave and the dampened wave being emitted for each phase of the rectangular wave, the lifetime of the dampened wave being between 10 ns and 500 μ s, preferably between 100 ns and 100 μ s.

In one specific embodiment, the potential difference existing between the lower level and the higher level of the rectangular wave is between 5 and 200 V, preferably between 12 and 60 V, while the dampened waves are waves whose variations are located within a band ranging between a minimum level and a maximum level, the potential difference between the two said levels being between 1 and 60 V, preferably between 10 and 35 V.

The said means for electromagnetic treatment of an aqueous medium can also be the apparatus as described in American patent US-4,879,045, incorporated herein by way of reference.

The inventors have discovered, unexpectedly, that the device of the invention, comprising a means for electromagnetic treatment of the liquid medium located upstream of the elements for treating the aqueous medium with microbubbles in a high-frequency ultrasound field, makes it possible to obtain a wide range of supersaturation with salts in the liquid medium before the crystallization phenomenon appears.

The term "supersaturation with salts" is intended to refer to the possibility of increasing the concentration of salts in the aqueous medium (beyond the concentration corresponding to the solubility product of the salts) without precipitating the said salts.

For example, the said salts consist of calcium carbonate present in the aqueous medium, which may be supplied via a connection of the aqueous medium to

water in the uptake and distribution network or by adding the said salts to the liquid medium.

This large amount of salts present in the aqueous medium can also be obtained by a partial evaporation of the water, this phenomenon being particularly important in cooling towers.

The liquid medium can also comprise a supersaturation with other salts, such as alkali metal or alkaline-earth metal phosphates or sulphates, etc.

The inventors have observed, unexpectedly, that it is possible to obtain a concentration of salts, in particular of calcium carbonate, in the treated liquid medium, which is 10 times as high as the saturation concentration (maximum dissolution before precipitation).

Advantageously, it is also observed that the water thus treated remains clear.

Such a device makes it possible to develop anti-tartar systems, to produce waters supersaturated with salts, to induce biotoxic effects on certain microorganisms due to the presence of water supersaturated with certain salts, etc.

Such a device also makes it possible to obtain concentrated media without precipitation and to generate specific chemical reactions by addition of reagents.

The inventors have discovered, unexpectedly, that in order to obtain this phenomenon of supersaturation with salts in the treated aqueous media at an optimum level, it is necessary for the electromagnetic treatment device to be separate from the compartment in which the emission of microbubbles in the ultrasound field takes place, and preferably for it to precede the emission.

The device according to the present invention can comprise, arranged between the reservoir 6 containing the liquid medium to be treated and the tube 2, a pump 7 for circulating the liquid medium, as well as means for recovering, preferably by filtration, centri-

fugation or precipitation (such as cyclones, etc.), the microorganisms and/or the salts present in the liquid medium.

Another aspect of the present invention relates to the use of the device according to the invention for neutralizing and/or removing the microorganisms, in particular algae, present in a liquid medium to be treated.

The expression "neutralization and/or removal of a microorganism" is intended to refer to the reduction or maintenance below a certain concentration level (which varies for each microorganism and each liquid medium) of the microorganisms liable to multiply in this liquid medium.

A final aspect of the present invention relates to the use of the device according to the invention to bring about a supersaturation with salts in the liquid medium, preferably in the aqueous medium, i.e. to obtain salt concentrations greater than the natural solubility of these salts in the liquid medium, preferably a concentration 5 times, or even 10 times, as high as the natural solubility of these salts.

The supersaturated media thus obtained can be used to bring about specific chemical reactions by addition of reagents, thus giving the products formed novel properties (size, shape, specific surface, etc.). The reagents added can be solid, liquid or gaseous or can consist of heterogeneous mixtures.

WHAT IS CLAIMED IS:

1. A device for treating a liquid medium, comprising:
 - a reservoir for holding the liquid medium to be treated, the reservoir being in fluid communication with a compartment;
 - an ultrasound emitter located relative to the compartment to emit ultrasound into the liquid in the compartment during use of the device, the ultrasound emitter emitting high-frequency ultrasound between about 60 kHz and 10MHz, wherein the ultrasound emitter is oriented obliquely to the axis of the compartment such that the ultrasound emitted does not generate a standing wave phenomena in the liquid in the compartment; and
 - a microbubble emitter emitting bubbles with an average diameter of less than 1 mm, the microbubble emitter being arranged relative to the compartment so as to emit microbubbles into the high-frequency ultrasound field emitted into the compartment during use of the device.
2. A device according to Claim 1, wherein the average diameter of the microbubbles is less than 50 μm .
3. A device according to Claim 1, wherein the microbubble emitter is placed at the base of the compartment and during use of the device the microbubbles move by either rising naturally or by entrainment of the gas microbubbles in the liquid.
4. A device according to Claim 1, further comprising a light emitter located relative to the compartment to emit light into the ultrasound field in the compartment during use of the device, the light emitting electromagnetic radiation mainly in the visible range.
5. A device according to Claim 1, further comprising a means for electromagnetic treatment of the liquid so as to modify at least one of the nucleation, formation and growth of salt crystals during use of the device, said means being placed between the reservoir and the compartment.
6. A device according to Claim 1 further comprising one or more means for collecting any microorganisms and/or salts present in the treated liquid during use of the device.

7. A device for treating a liquid medium to neutralize, remove and/or prevent the growth of undifferentiated cells and/or of microorganisms present in the liquid medium comprising:

means for placing the liquid medium in fluid communication with a compartment to place medium in the compartment;

means for emitting high-frequency ultrasound between about 60 kHz and 10 MHZ into the medium in the compartment, wherein said means is oriented obliquely to the axis of the compartment such that the ultrasound emitted does not generate a standing wave phenomena in the liquid in the compartment; and

means for emitting microbubbles with an average diameter of less than 1 mm, into the high-frequency ultrasound field emitted into the medium in the compartment.

8. A device according to Claim 7, further comprising means for electromagnetic treatment of the medium so as to modify at least one of the nucleations, formation and growth of salt crystals in the medium.

9. A method for treating a liquid medium to neutralize, remove and/or prevent the growth of undifferentiated cells and/or of microorganisms present in the liquid medium comprising the steps of:

placing the liquid medium in fluid communication with a compartment to place medium in the compartment;

emitting high-frequency ultrasound between about 60 kHz and 10 MHz into the medium in the compartment with an ultrasound emitter oriented obliquely to the axis of the compartment such that the ultrasound emitted does not generate a standing wave phenomena in the liquid in the compartment; and

emitting microbubbles with an average diameter of less than 1 mm, into the high-frequency ultrasound field emitted into the medium in the compartment.

10. A method according to Claim 9, wherein the microorganisms are selected from the group consisting of bacteria, viruses and algae.

11. A method according to Claim 9, wherein the undifferentiated cells are at least one of cancer cells and bone marrow cells.

12. A method according to Claim 9, comprising the further steps of providing a liquid medium containing salts, electromagnetically treating the medium so as to modify at least one of the nucleation, formation and growth of salt crystals in the medium, and bringing about a supersaturation of salts in the medium by the emitting ultrasound and microbubbles.

13. A method according to Claim 9, wherein that the supersaturation with salts in the liquid medium comprises the steps of obtaining a salt concentration which is greater than the natural solubility of the salt in the liquid medium of at least 5 times as high as the natural solubility of the salt in the liquid medium.

14. A method according to Claim 11, comprising the further step of adding reagents to the liquid medium to bring about one of a chemical reaction, precipitation reaction and crystallization reaction.

15. A device for treating a liquid medium in an industrial circuit, comprising:
a reservoir for holding the liquid medium to be treated, the reservoir being in fluid communication with a compartment;

an ultrasound emitter located relative to the compartment to emit ultrasound into the liquid in the compartment during use of the device, the ultrasound emitter emitting high-frequency ultrasound between about 60 kHz and 10 MHz, wherein the ultrasound emitter is oriented obliquely to the axis of the compartment such that the ultrasound emitted does not generate a standing wave phenomena in the liquid in the compartment;

a microbubble emitter emitting bubbles with an average diameter of less than 1 mm, the microbubble emitter being arranged relative to the compartment so as to emit microbubbles into the high-frequency ultrasound field emitted into the compartment during use of the device.

16. The device of Claim 15, wherein the industrial circuit is a cooling circuit.

17. The device of Claim 15, wherein the industrial circuit is a cooling tower.

18. The device of Claim 15, further comprising a light emitter located relative to the compartment to emit light into the ultrasound field in the compartment during use of the device, the light emitting electromagnetic radiation mainly in the visible range.

19. A method for treating a liquid medium in an industrial circuit comprising:

placing the liquid medium in a compartment;

emitting high-frequency ultrasound between about 60 kHz and 10 MHz into the medium in the compartment with an ultrasound emitter oriented obliquely to the axis of the compartment such that the ultrasound emitted does not generate a standing wave phenomena in the liquid in the compartment; and

emitting microbubbles with an average diameter of less than 1 mm, into the high frequency ultrasound field emitted into the medium in the compartment.

20. The method of Claim 19, wherein the industrial circuit is a cooling circuit.

21. The method of Claim 19, wherein the industrial circuit is a cooling tower.

22. The method of Claim 19, wherein the liquid medium contains salts, the method further comprising:

electromagnetically treating the medium so as to modify at least one of the nucleation, formation and growth of salt crystals in the medium; and

supersaturating the salts in the medium by emitting ultrasound and microbubbles.

23. A method for treating cancer cells in a medium comprising:

emitting high-frequency ultrasound between about 60 kHz and 10 MHz into the medium with an ultrasound emitter; and

emitting microbubbles with an average diameter of less than 1 mm, into the high-frequency ultrasound field emitted into the medium.

DEVICE AND PROCESS FOR TREATING A LIQUID MEDIUM.Abstract of the Disclosure

A device for treating liquid medium has an ultrasound emitter located relative to a compartment of a container holding a liquid medium and a microbubble emitter located relative to the compartment. The ultrasound emitter emits high-frequency ultrasound between about 200 KHz and 10 MHz. The microbubble emitter emits bubbles with an average diameter of less than 1 mm.

S:\DOCS\MCB\MCB-1733.DOC
020303

COPY

Attorney's Docket No. VANMA99.001APC

DECLARATION - USA PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND DEVICE FOR TREATING A LIQUID MEDIUM; the specification of which was filed on August 27, 1999 as Application Serial No. 09/214,398.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above;

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56;

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)Priority
Claimed

No.: 09600613

Country: Belgium

Date Filed: 04/07/96

Yes

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful, false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor: Eric Cordemans de Meulenaer

Inventor's signature

Date

Residence: Wezembeek-Oppem, Belgium

Citizenship: Belgian

Post Office Address: Chemin Ducal, 26, B-1970 Wezembeek-Oppem, Belgium

10358445.020402

COPY

Page 2

Attorney's Docket No. VANMA99 001APC

Full name of second inventor: Sandouin Hannecart

Inventor's signature Hannecart.

Date 09 Jan 2003

Residence: La Roche-En-Ardenne, Belgium

Citizenship: Belgian

Post Office Address: Nisramont, 30, B-6983 La Roche-En-Ardenne, Belgium

Full name of third inventor: Yves Canivet

Inventor's signature Canivet

Date 03 JAN 2003.

Residence: Evere, Belgium

Citizenship: Belgian

Post Office Address: Rue du Maquis, 130, B-1140 Evere, Belgium

Send Correspondence To:

KNOBBE, MARTENS, OLSON & BEAR, LLP
Customer No. 20,995

S:\DOCS\MCR\MCR-1687.DOC
010803

1/4

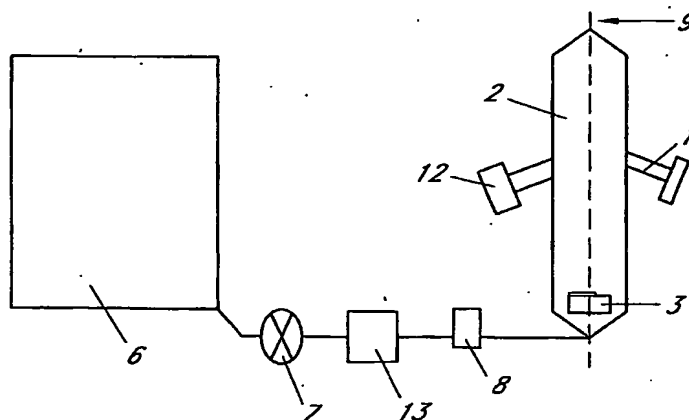


FIG. 1

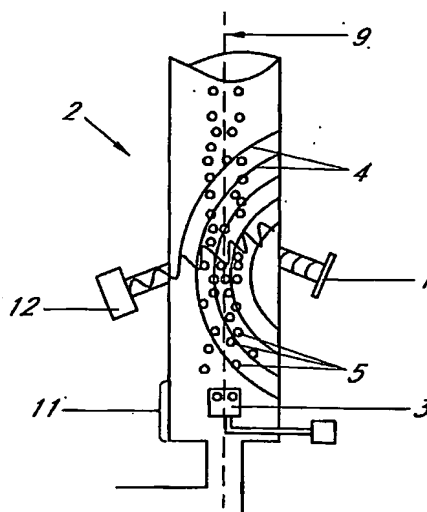


FIG. 2

10358445-020403
DEVICE AND PROCESS FOR TREATING A LIQUID MEDIUM

De Meulenaer, et al.

Appl. No.: Unknown Atty Docket: VANMA99.001C1

2/4

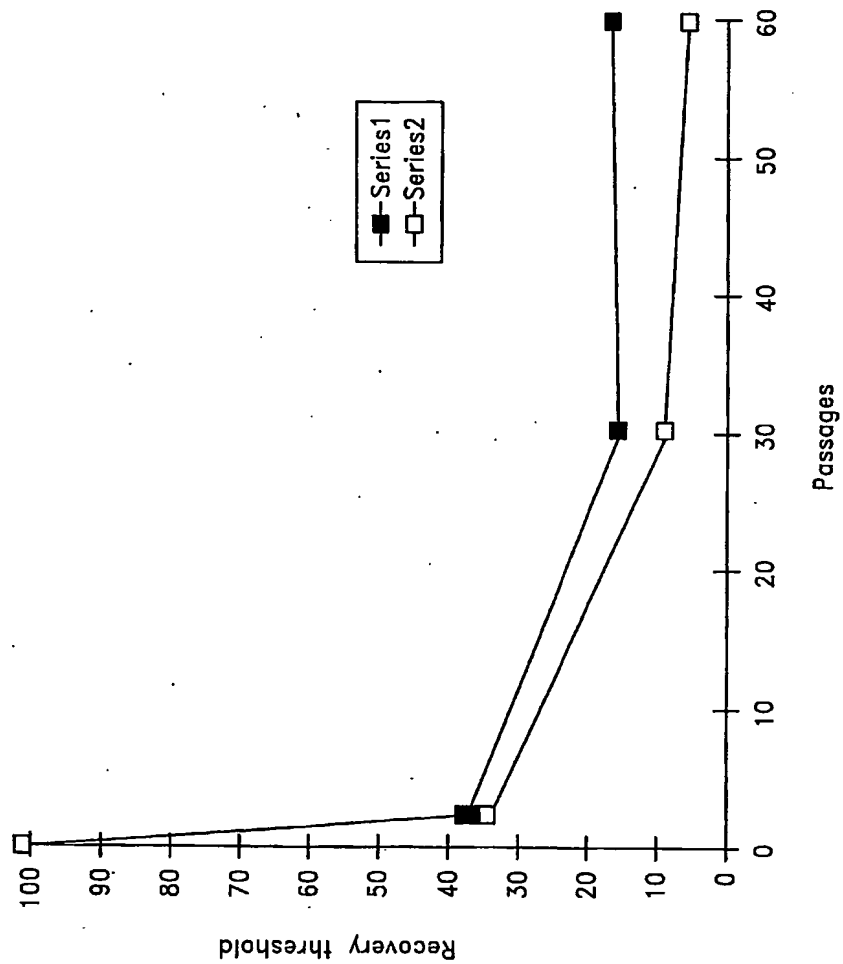


FIG. 3

10358445 . 020402
DEVICE AND PROCESS FOR TREATING A LIQUID MEDIUM

De Meulenaer, et al.

Appl. No.: Unknown Atty Docket: VANMA99.001C1

3/4

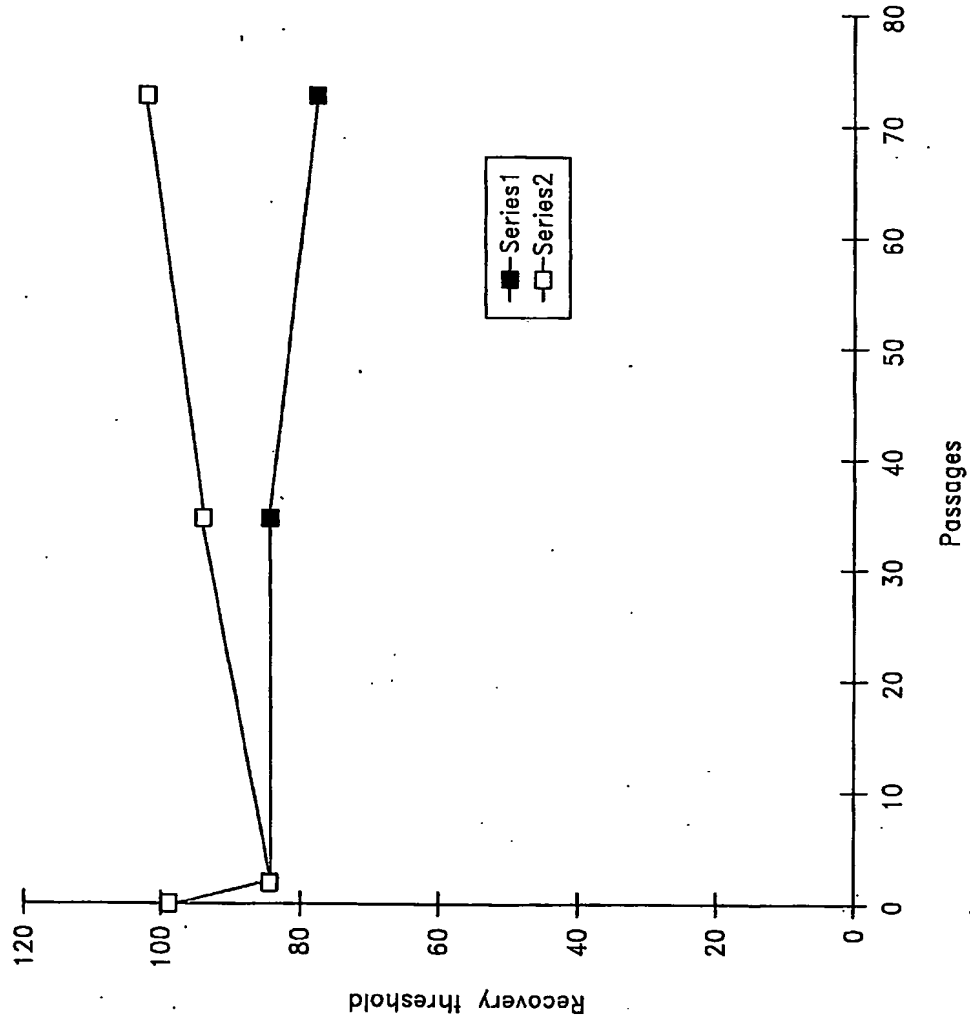


FIG. 4

4/4

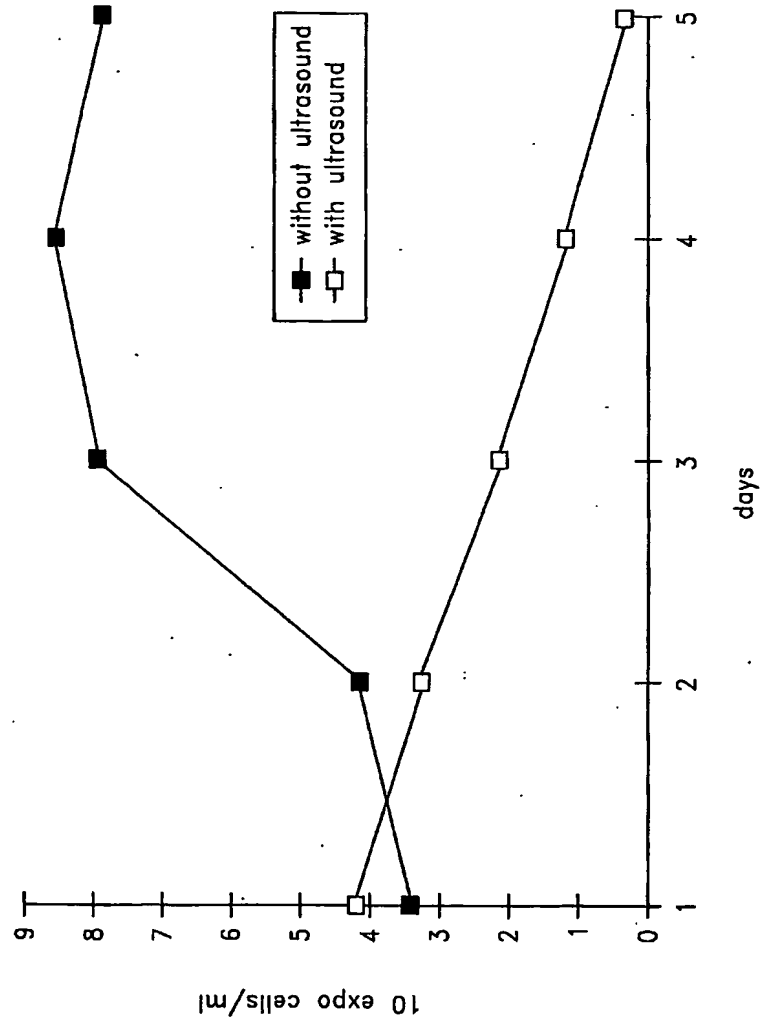


FIG. 5

This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the
original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**